Filtermedium CC 600 GC 85/95

Description

- synthetic filter media
- progressive construction of filter layer
- chemical bonding
- reinforcing screen and fine fibre layer at clean air side
- special finishing for increasing dust holding capacity

Types

Article	Type of delivery	Size ((WxL)
1-7001000500	Filter pad	500x1000 mm
1-7001000600	Filter pad	600x1000 mm
1-7001000700	Filter pad	700x1000 mm

Different sizes of filter pads available.

Technical Data

Filter class:	DIN EN 779	F7	F8
Average arrestance:	DIN EN 779	> 98%	> 98%
Average efficiency:	DIN EN 779	85%	93%
Nominal airflow:	$m^3/h*m^2$	1080	1080
Max. airflow:	$m^3/h*m^2$	2520	2520
Initial pressure drop:	Pa	100	145
Final pressure drop (recommended):	Pa	400	400
Thickness of material:	mm	22	22
Colour of media:	-	white	white
Regenerable:	-	no	no
Max.operation temperature:	°C	100	100
Max. operation moisture (rel. humidity);	%	100	100
Inflammability:	DIN 53438	F1	F1

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 5/15

Pressure Drop

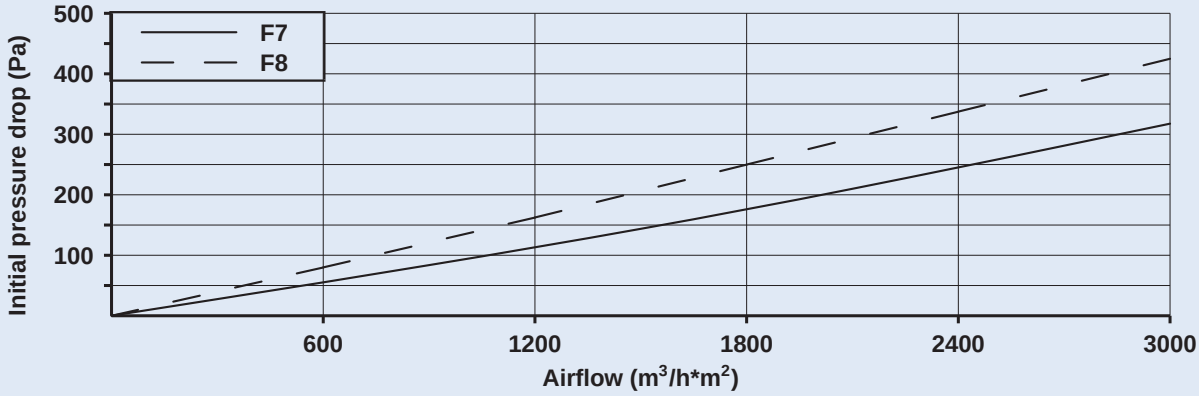

Ihr Partner für Filtertechnik