


Filterzelle RELIM 20-7/-8

Description

- RELIM Panel Filter with closely pleated filter media made of synthetic micro spunbond
- combustible, metall free designs
- KALTHOFF pleating system for low resistance performance
- synthetic FIBERPLAST-frame
- special designs with different frame geometries as per data sheet 2.4.05

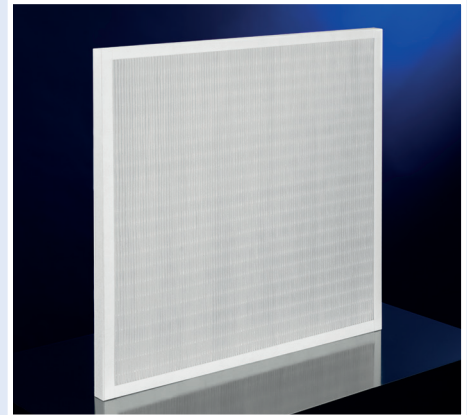

Types


Article	Size (WxHxD)	Filter area	Range of nominal airflow (100-125%)
R20 592 592	592x592x20 mm	2,25 m ²	1100-1400 m ³ /h
R20 592 287	592x287x20 mm	1,09 m ²	550-700 m ³ /h
R20 287 287	287x287x20 mm	0,53 m ²	250-300 m ³ /h
R20 592 490	592x490x20 mm	1,86 m ²	900-1150 m ³ /h

Technical Data

Filter class:	DIN EN 779	F7	F8
Filter group:	DIN ISO 16890	ISO ePM1 55%	ISO ePM1 70%
Efficiency:	ePM1	58%	73%
Pressure drop at 100% nominal airflow			
initial:	Pa	80	95
final (recommended):	Pa	450	300
Number of layers:	-	3	3
Max. operation temperature:	°C	80	80
Max. operation moisture (rel. humidity):	%	100	100
Classification of inflammability:	DIN EN 13501	E	E

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 9/19

Pressure Drop

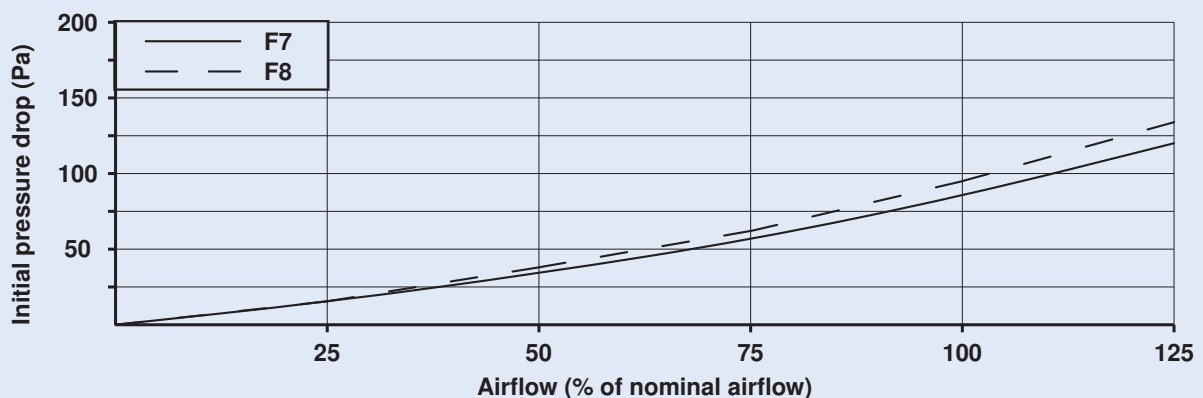

Ihr Partner für Filtertechnik

