


Filterzelle RELIM 25-7/-8

Description

- RELIM Panel Filter with closely pleated filter media made of synthetic micro spunbond
- combustible, metal free designs
- KALTHOFF pleating system for low resistance performance
- synthetic FIBERPLAST-frame
- special designs with different frame geometries as per data sheet 2.4.05

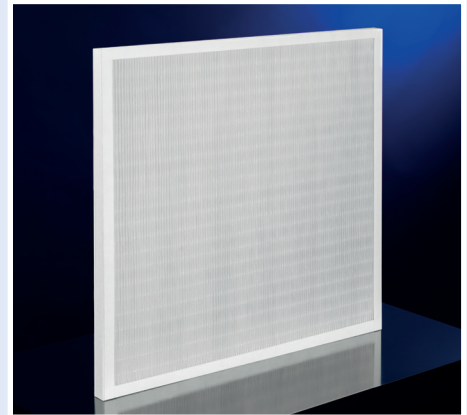

Types


Article	Size (WxHxD)	Filter area	Range of nominal airflow (100-125%)
R25 592 592	592x592x25 mm	2,95 m ²	1100-1350 m ³ /h
R25 592 287	592x287x25 mm	1,42 m ²	550-700 m ³ /h
R25 287 287	287x287x25 mm	0,69 m ²	250-300 m ³ /h
R25 592 490	592x490x25 mm	2,44 m ²	900-1150 m ³ /h

Technical Data

Filter class:	DIN EN 779	F7	F8
Filter group:	DIN ISO 16890	ISO ePM1 55%	ISO ePM1 70%
Efficiency:	ePM1	58%	73%
Pressure drop at 100% nominal airflow			
initial:	Pa	60	75
final (recommended):	Pa	300	300
Number of layers:	-	3	3
Max. operation temperature:	°C	80	80
Max operation moisture (rel. humidity):	%	100	100
Classification of inflammability:	DIN EN 13501	E	E

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right to technical modifications. Version 9/19

Pressure Drop

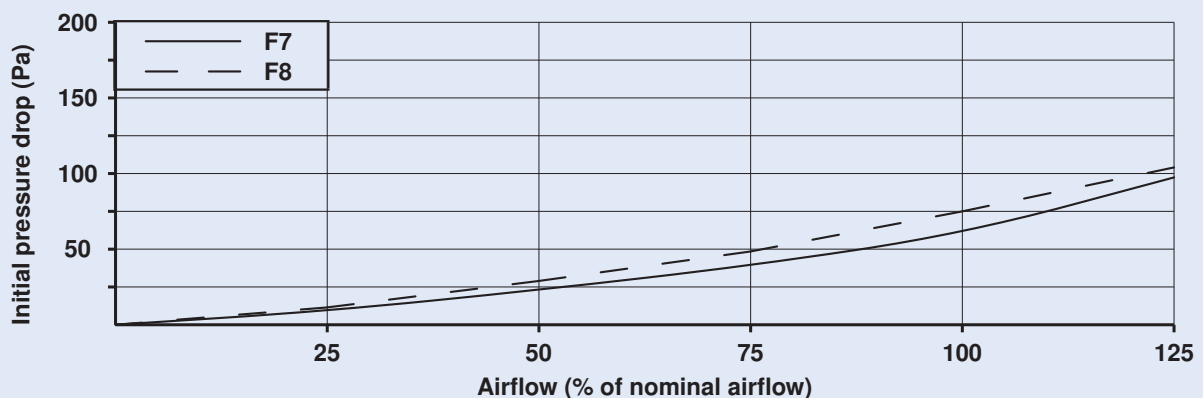

Ihr Partner für Filtertechnik

