


Kompaktfilter RELIM VRK 98

Description

- RELIM Compact Air Filter from stable, multi-sided sealed filter plates
- closely pleated filter media made of synthetic multi-layer micro spunbond
- KALTHOFF INTERMELT-pleating system for low resistance performance
- strong KALTHOFF casing from full plastic
- suitable for high airflows

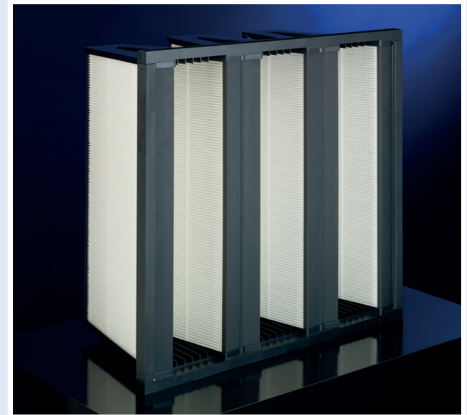

Types


Article	VRK 98-6	VRK 98-5	VRK 98-3
Front size (WxH)	592x592 mm	592x490 mm	592x287 mm
Depth of cartridge (D)	292 mm	292 mm	292 mm
Filtering surface	13,3 m ²	11,0 m ²	6,6 m ²
Nominal airflow (100-125%)	4250-5300 m ³ /h	3500-4400 m ³ /h	2100-2600 m ³ /h

Technical Data

Filter class:	DIN EN 779	F9
Filter group:	DIN ISO 16890	ISO ePM1 80%
Efficiency:	ePM1	80%
Pressure drop at 100% nominal airflow		
initial:	Pa	175
final (recommended):	Pa	300
Max. operation temperature:	°C	80
Max. operation moisture (rel. humidity):	%	100
Classification of inflammability:	DIN EN 13501	E

Technical data are being compiled to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 1/19

Pressure Drop

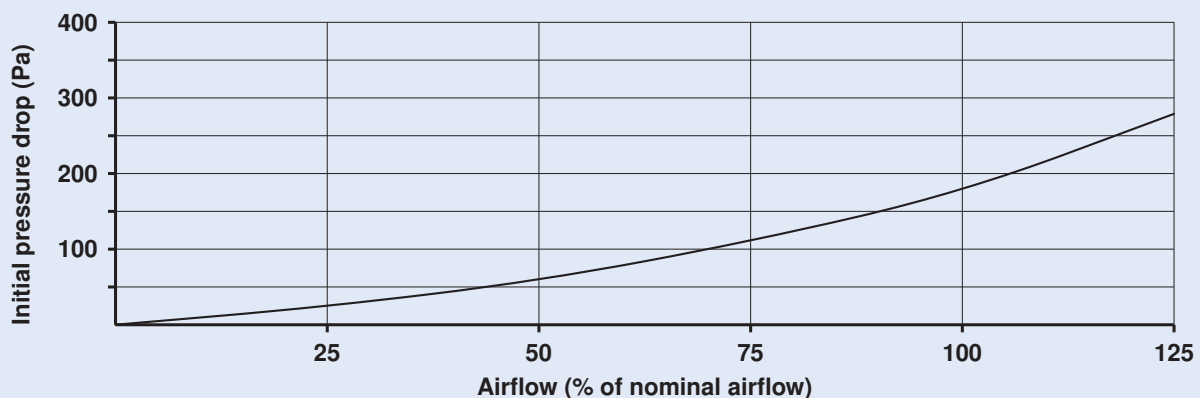

Ihr Partner für Filtertechnik

