


Kompaktfilter RELIM VRK R

Description

- RELIM Compact Air Filter from stable, multi-sided sealed filter plates
- closely pleated filter media made of synthetic multi-layer micro spunbond
- KALTHOFF INTERMELT-pleating system for high solidity and low resistance performance
- strong KALTHOFF casing from full plastic
- suitable for high airflows

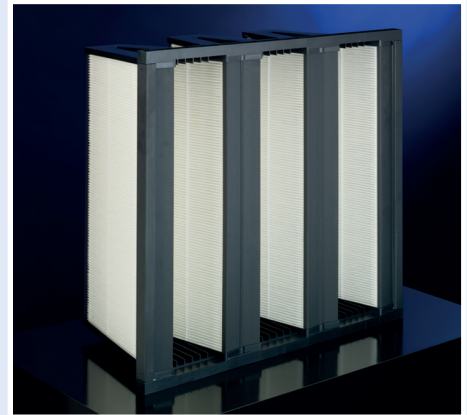

Types


Article	VRK R-6	VRK R-5	VRK R-3
Front size (WxH)	592x592 mm	592x490 mm	592x287 mm
Depth of cartridge (D)	292 mm	292 mm	292 mm
Filtering surface	13,3 m ²	11,0 m ²	6,6 m ²
Nominal airflow (100-125%)	2000-2500 m ³ /h	1650-2050 m ³ /h	1000-1250 m ³ /h

Technical Data

Filter class:	DIN EN 1822	E11
Arrestance (MPPS):	DIN EN 1822	> 95%
Pressure drop at 100% nominal airflow:		
initial:	Pa	100
final (recommended):	Pa	450
Max. operation temperature:	°C	80
Max. operation moisture (rel. humidity):	%	100
Classification of inflammability:	DIN EN 13501	E

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 3/15

Pressure Drop

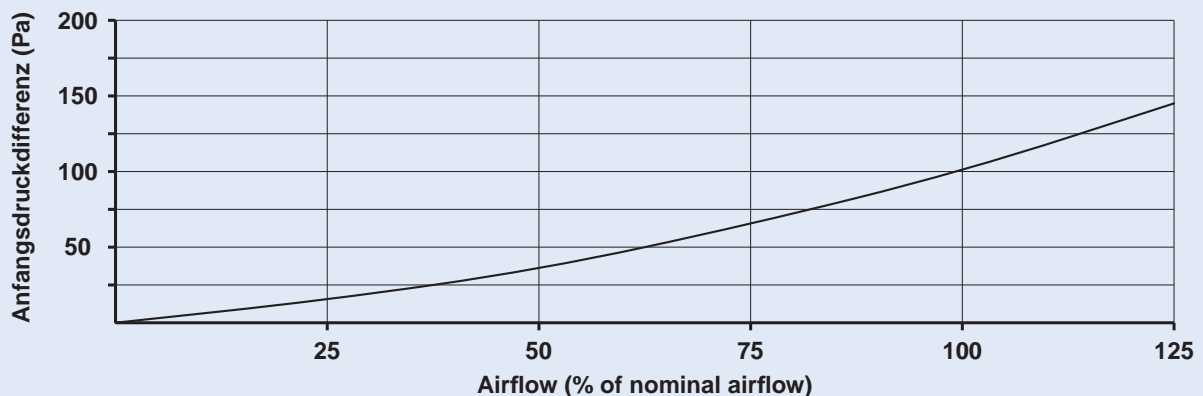

Ihr Partner für Filtertechnik

