


## Kompaktfilter FLUWID VSK 65

### Description

- FLUWID Compact Air Filter from stable, multi-sided sealed filter plates
- closely pleated filter media made of homogeneously structured micro-glass fiber paper
- KALTHOFF INTERMELT-pleating system for high solidity and low resistance performance
- strong KALTHOFF casing from full plastic
- airflow direction, conditions for mounting and service optional at site
- suitable for high airflows

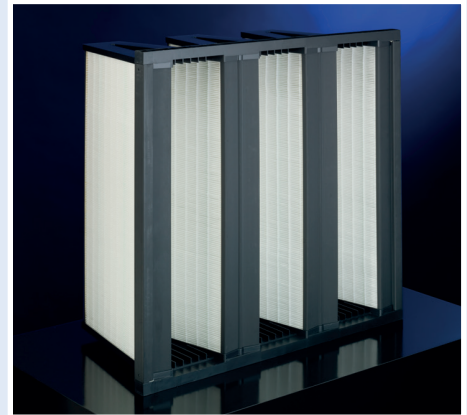

### Types


Article	VSK 65-6	VSK 65-5	VSK 65-3
Front size (WxH)	592x592 mm	592x490 mm	592x287 mm
Depth of cartridge (D)	292 mm	292 mm	292 mm
Filtering surface	17,0 m <sup>2</sup>	14,0 m <sup>2</sup>	8,3 m <sup>2</sup>
Nominal airflow (100-125%)	4250-5300 m <sup>3</sup> /h	3500-4400 m <sup>3</sup> /h	2100-2600 m <sup>3</sup> /h

### Technical Data

Filter class:	DIN EN 779	M6
Filter group:	DIN ISO 16890	ISO ePM2,5 50%
Efficiency:	ePM2,5	52%
<b>Pressure drop at 100% nominal airflow</b>		
initial:	Pa	100
final (recommended):	Pa	300
Max. operation temperature:	°C	80
Max. operation moisture (rel. humidity):	%	80
Classification of inflammability:	DIN EN 13501	E

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 1/19

### Pressure Drop

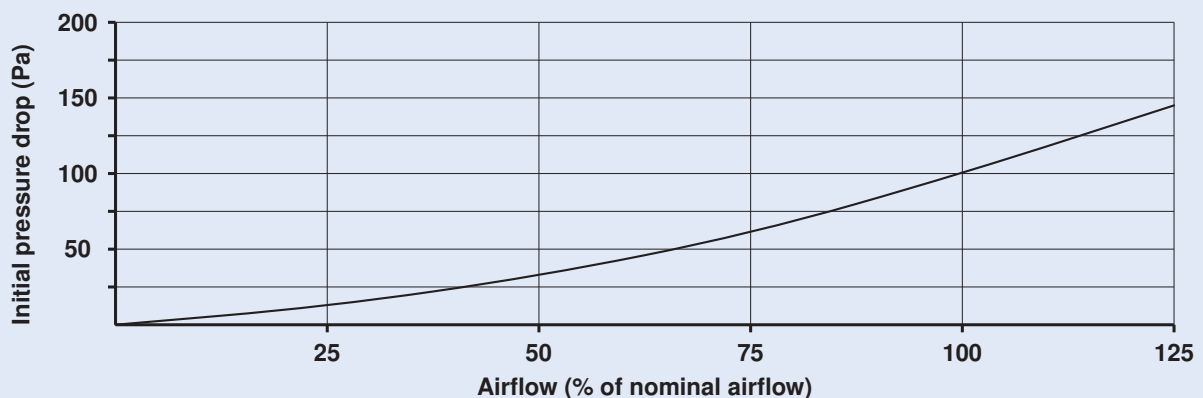

Ihr Partner für Filtertechnik

