


Kompaktfilter FLUWID VSK 98

Description

- FLUWID Compact Air Filter from stable, multi-sided sealed filter plates
- closely pleated filter media made of homogeneously structured micro-glass fiber paper
- KALTHOFF INTERMELT-pleating system for high solidity and low resistance performance
- strong KALTHOFF casing from full plastic
- airflow direction, conditions for mounting and service optional at site
- suitable for high airflows

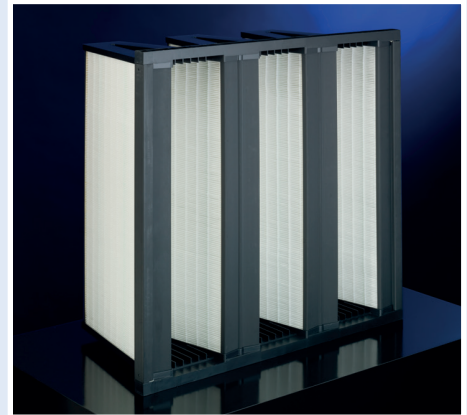

Types

Article	VSK 98-6	VSK 98-5	VSK 98-3
Front size (WxH)	592x592 mm	592x490 mm	592x287 mm
Depth of cartridge (D)	292 mm	292 mm	292 mm
Filtering surface	17,0 m ²	14,0 m ²	8,3 m ²
Nominal airflow (100-125%)	4250-5300 m ³ /h	3500-4400 m ³ /h	2100-2600 m ³ /h

Technical Data

Filter class:	DIN EN 779:2012	F9
Filter group:	DIN ISO 16890	ePM1 85%
Efficiency:	ePM1 85%	87%


Pressure drop at 100% nominal airflow

initial:	Pa	140
final (recommended):	Pa	300

Max. operation temperature:	°C	80
Max. operation moisture (rel. humidity):	%	80
Classification of inflammability:	DIN EN 13501	E

Technical data are being compiled to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 1/19

Pressure Drop

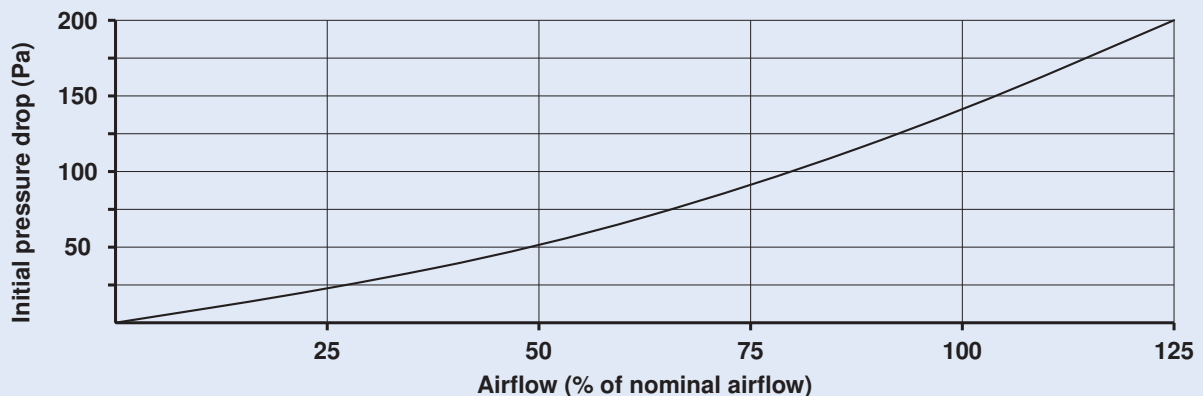

Ihr Partner für Filtertechnik

