

Filtermedium VNF-290/-295

Description

- synthetic filter media
- progressive construction of filter layer
- thermally bonded
- clean air side optically marked



Types

Type of delivery	Article	Size (WxL)
Filter roll	VNF-290/-295	2x20 m
Filter pad	VNF-290/-295	optional


Different sizes and geometries of filter pads available.

Technical Data

Filter class:	DIN EN 779	G3	G4
Filter group:	DIN ISO 16890	ISO Coarse 80%	ISO Coarse 85%
Efficiency:	ISO Coarse	82%	86%
Nominal airflow:	m ³ /h*m ²	5400	3600
Max. airflow:	m ³ /h*m ²	7200	5400
Initial pressure drop:	Pa	40	29
Final pressure drop (recommended):	Pa	150	150
Thickness of media:	mm	17	19
Colour of media:	-	white	white
Max. operation temperature:	°C	100	100
Max. operation moisture (rel. humidity):	%	100	100
Inflammability:	DIN 53438	F1	F1

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 02/19

Pressure Drop

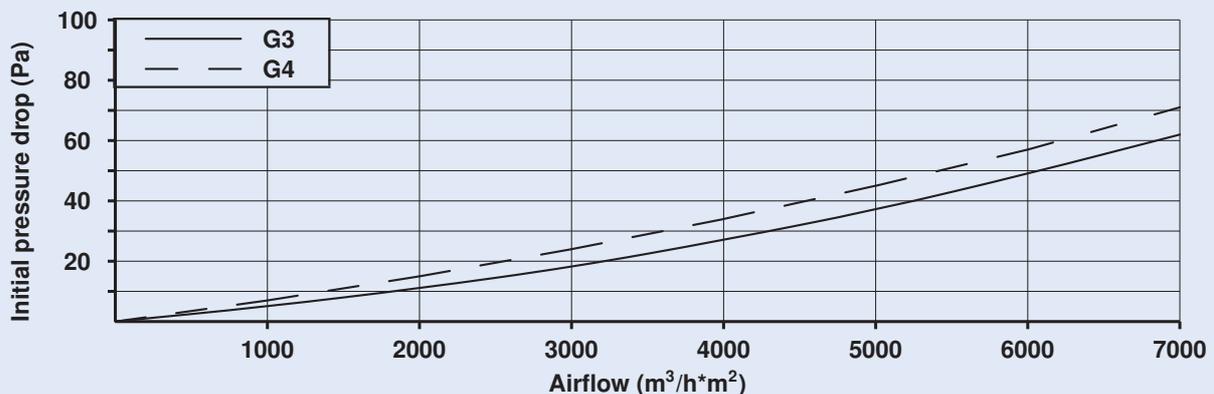

Ihr Partner für Filtertechnik

