

## Aktivkohlepatrone AVPC

### Description

- KALTHOFF Activated Carbon for use in KALTHOFF activated carbon filter units type AR for arresting gaseous odour and harmful substances
- compacted bed of activated carbon between inside and outside cylinder
- various types and shapes of activated carbon available
- activated carbon with bayonet locking device
- activated carbon cartridge from galvanized screen sheet or in plastic design
- for use in combination with particle filter



### Types


Article	Diameter (D)	Length (L)
AVPC 2600	145 mm	455 mm
AVPC 1000	145 mm	255 mm

### Technical Data

		AVPC 2600	AVPC 1000
Mass of activated carbon:	kg	2,1	1,25
Volume of activated carbon:	l	approx. 4,2	approx. 2,5
Layer depth of activated carbon:	mm	26	26
Nominal airflow:	m <sup>3</sup> /h	160	160
Apparent time of contact:	sec.	0,1	0,04
Pressure drop at 100% nominal airflow:	Pa	100	90

Technical data are being compiled to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 12/12

### Pressure Drop

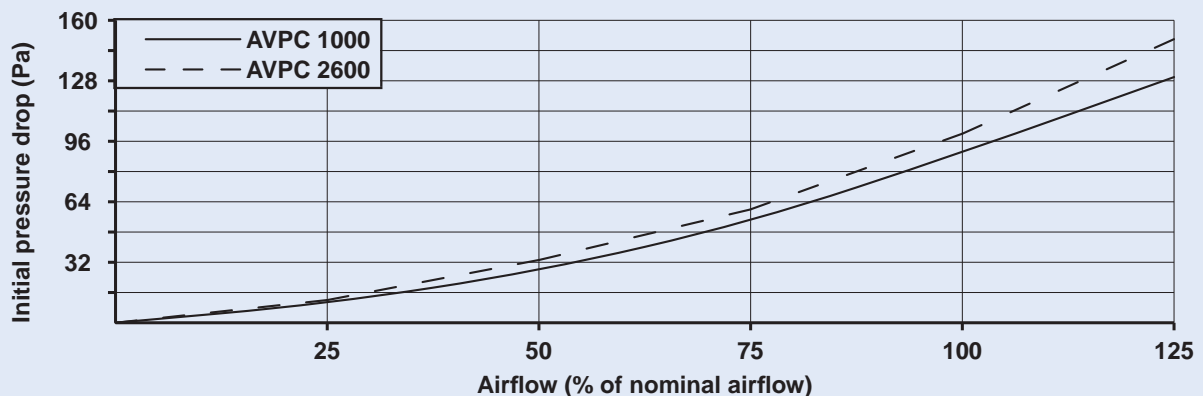

Ihr Partner für Filtertechnik

