

Filtermedium CT 15-350/-500

Description

- synthetic filter media
- thermally bonded
- progressive construction of filter layer



Types

Type of delivery	Article	Size (WxL)
Filter roll	CT 15-350/-500	2x20 m
Filter pad	CT 15-350/-500	optional


Different sizes and geometries of filter pads available.

Technical Data

		CT 15-350	CT 15-500
Filter class:	DIN EN 779	G4	G4
Filter group:	DIN ISO 16890	ISO Coarse 85%	ISO Coarse 85%
Efficiency:	ISO Coarse	86%	87%
Nominal airflow:	m ³ /h*m ²	3600	3600
Max. airflow:	m ³ /h*m ²	5400	5400
Initial pressure drop:	Pa	28	35
Final pressure drop (recommended):	Pa	250	250
Thickness of media:	mm	18-20	20-22
Colour of media:	-	white	white
Max. operation temperature:	°C	100	100
Max. operation moisture (rel. humidity):	%	100	100
Inflammability:	DIN 53438	F1	F1

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 02/19

Pressure Drop

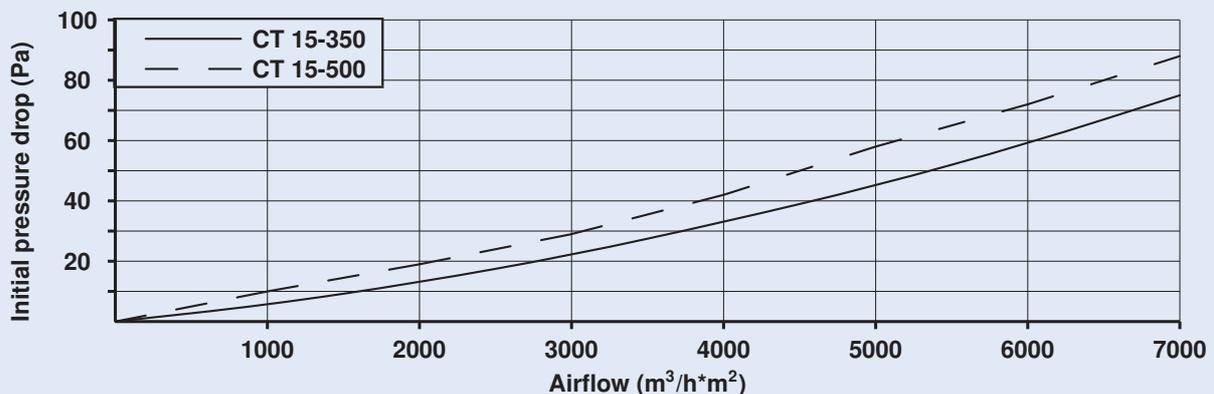

Ihr Partner für Filtertechnik

