

Filtermedium C3-250/-360

Description

- synthetic filter media
- progressive construction of filter layer
- thermally bonded
- special lamination at clean air side



Types

Type of delivery	Article	Size (WxL)
Filter roll	C3-250/-360	2x20 m
Filter pad	C3-250/-360	optional


Different sizes and geometries of filter pads available.

Technical Data

		C3-250	C3-360
Filter class:	DIN EN 779	M5	M5
Filter group:	DIN ISO 16890	ISO Coarse 90%	ISO Coarse 90%
Efficiency:	ISO Coarse	92%	94%
Nominal airflow:	m ³ /h*m ²	2520	2520
Max. airflow:	m ³ /h*m ²	3600	3600
Initial pressure drop:	Pa	40	70
Final pressure drop (recommended):	Pa	400	400
Thickness of media:	mm	15-18	20-22
Colour of media:	-	white	white
Max. operation temperature:	°C	100	100
Max. operation moisture (rel. humidity):	%	100	100
Inflammability:	DIN 53438	F1	F1

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 02/19

Pressure Drop

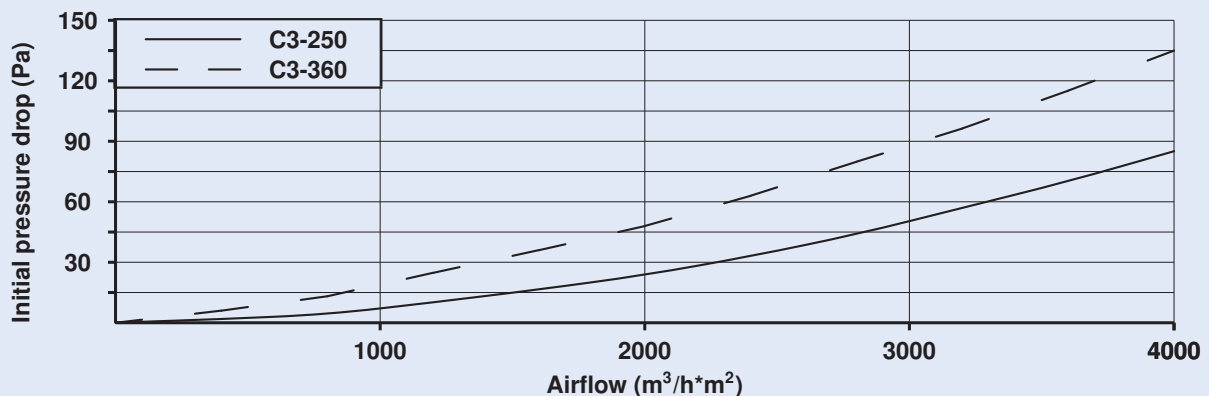

Ihr Partner für Filtertechnik

