

Filtermedium SYNTH WEISS

Description

- synthetic filter media for paint arrestance
- thermally bonded
- high rigidity
- high pore volume
- coarse fibre structure



Types

Type of delivery	Article	Size (WxL)
Filter roll	SYNTH WHITE	2x22 m
Filter pad	SYNTH WHITE	optional


Different sizes and geometries of filter pads available.

Technical Data

Filter class:	DIN EN 779	G3
Filter group:	DIN ISO 16890	ISO Coarse 80%
Efficiency:	ISO Coarse	83%
Nominal airflow:	$\text{m}^3/\text{h}\cdot\text{m}^2$	2500
Max. airflow:	$\text{m}^3/\text{h}\cdot\text{m}^2$	6300
Initial pressure drop:	Pa	12
Final pressure drop (recommended):	Pa	150
Thickness of media:	mm	35
Colour of media:	-	white
Max. operation temperature:	°C	100
Max. operation moisture (rel. humidity):	%	100
Inflammability:	DIN 53438	F1

Technical data are being complied to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 02/19

Pressure Drop

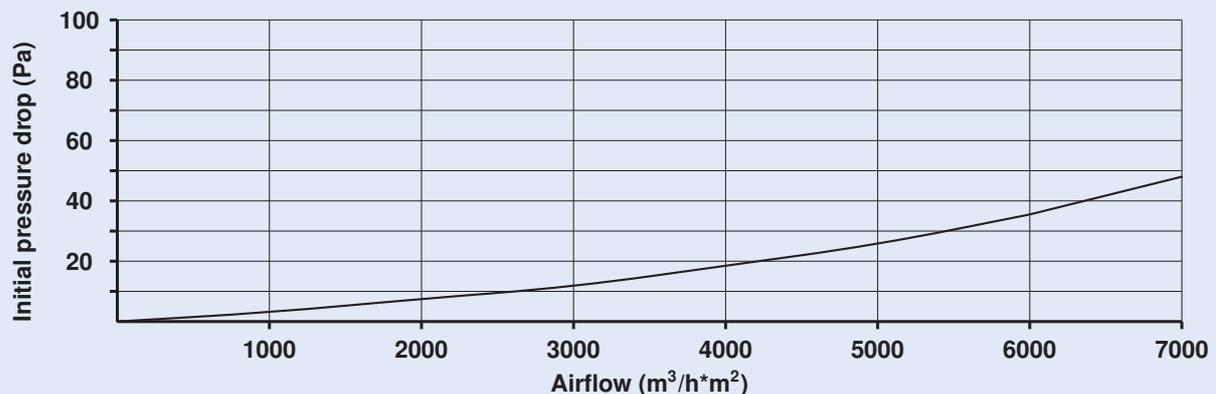

Ihr Partner für Filtertechnik

